


SAW Resonator

SMD2016 Series SAW Resonator

303MHz~1000MHz

Size: 2.0×1.6×1.0mm

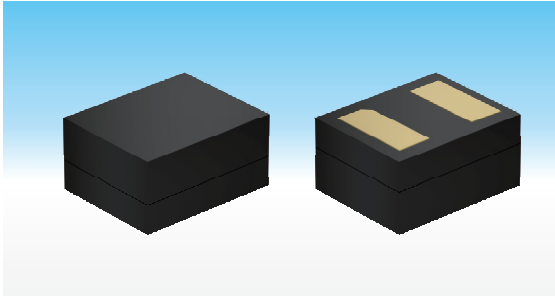

Features

- 1-port resonator, 2.0×1.6×1.0mm CSP package
- Low insertion loss
- Electrostatic Sensitive Device (ESD)
- Frequency range: 303MHz~1000MHz
- Applications: Alarm, Remote control, PEPS, Automotive electronics, Consumer electronics, etc
- RoHS Compliant /Pb Free



Standard Specifications

Part Number	Center Frequency (MHz)	Frequency Tolerance	Insertion Loss (dB) max.	Package Code
R303.825	303.825	±30KHz/±75KHz	1.5	2016
R315	315	±30KHz/±75KHz	1.5	2016
R390	390	±30KHz/±75KHz	1.5	2016
R433	433.92	±30KHz/±75KHz	1.9	2016
R435	435.72	±30KHz/±75KHz	1.6	2016

Note: More frequencies, more information, please contact with our sales department directly.

Dimensions

TOP View

Bottom View

Side View

Pin No.	Function
1	Input / Output
2	Output / Input