


SAW Resonator

DCC6 Series SAW Resonator

315MHz~868MHz

Size: 3.8×3.8×1.5mm

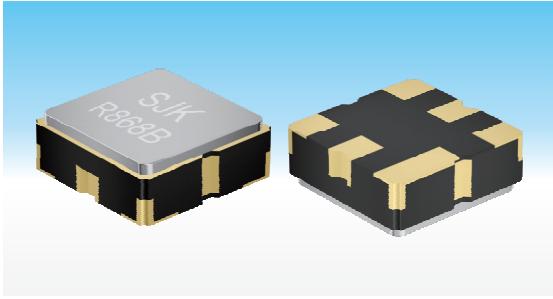

Features

- 1-port resonator, SMD 3.8×3.8×1.5mm 6-pin package
- Package code: DCC6
- Low insertion loss
- Electrostatic Sensitive Device (ESD)
- Frequency range: 303MHz~868MHz
- Applications: Alarm, Remote control, PEPS, Automotive electronics, Consumer electronics, etc
- RoHS Compliant /Pb Free



Standard Specifications

Part Number	Center Frequency (MHz)	Frequency Tolerance	Insertion Loss (dB) max.	Package Code
R315	315	±30KHz/±75KHz	1.5	DCC6
R385	385	±30KHz/±75KHz	1.8	DCC6
R418	418	±30KHz/±75KHz	1.6	DCC6
R433.42	433.42	±30KHz/±75KHz	1.4	DCC6
R433	433.92	±30KHz/±75KHz	1.9	DCC6
R868	868	±75KHz/±150KHz	2.1	DCC6

Note: More frequencies, more information, please contact with our sales department directly.

Dimensions

TOP View

Bottom View

Side View

Pin No.	Function
2	Input/Output
5	Output/Input
Other	GND