


SAW Resonator

D-11 Series SAW Resonator

303MHz~868MHz

Size: 8.3×3.4×3.0mm

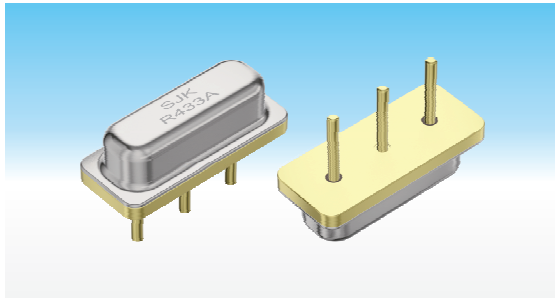

Features

- 1-port resonator, Metal can 8.36×3.45×3.0mm 3-pin package
- Package code: D-11
- Low insertion loss
- Electrostatic Sensitive Device (ESD)
- Frequency range: 303MHz~868MHz
- Applications: Alarm, Remote control, PEPS, Automotive electronics, Consumer electronics, etc
- RoHS Compliant /Pb Free



Standard Specifications

Part Number	Center Frequency (MHz)	Frequency Tolerance	Insertion Loss (dB) max.	Package Code
R303.825	303.825	±30KHz/±75KHz	1.5	D-11
R303.875	303.875	±30KHz/±75KHz	1.5	D-11
R315	315	±30KHz/±75KHz	1.5	D-11
R316.8	316.8	±30KHz/±75KHz	1.3	D-11
R330	330	±30KHz/±75KHz	1.6	D-11
R350	350	±30KHz/±75KHz	1.5	D-11
R360	360	±30KHz/±75KHz	1.4	D-11
R370	370	±30KHz/±75KHz	1.7	D-11
R390	390	±30KHz/±75KHz	1.5	D-11
R418	418	±30KHz/±75KHz	1.6	D-11
R433	433.92	±30KHz/±75KHz	1.9	D-11
R868	868.35	±75KHz/±150KHz	2.1	D-11

Note: More frequencies, more information, please contact with our sales department directly.

Dimensions

TOP View

Bottom View

Side View

Pin No.	Function
1	Input/Output
3	Output/Input
2	GND