


SAW Filter For Gateway

SAW Filter For Gateway

480MHz~915MHz

Size: 3.0×3.0×1.5mm

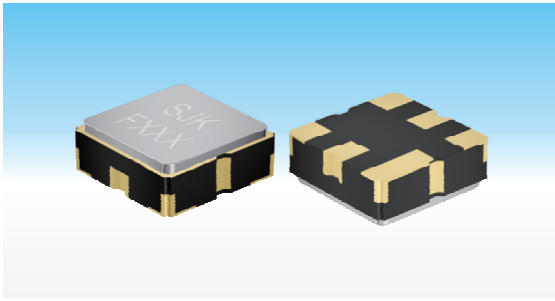

Features

- Ceramic packages suitable for surface-mount technology (SMT)
- Package code: DCC6C(SMD3030)
- Low insertion loss
- Electrostatic Sensitive Device (ESD)
- Frequency range: 480MHz~915MHz
- Applications: Gateway, Telecommunications, Network, etc
- RoHS Compliant /Pb Free






Standard Specifications

Part Number	Center Frequency (MHz)	Pass Bandwidth(MHZ)	Insertion Loss (dB) max.	Package Code
SF4632	480	14	1.0	SMD3030
SF8301	868.3	10	2.1	SMD3030
SF9883	915	26	1.4	SMD3030

Note: More frequencies, more information, please contact with our sales department directly.

Dimensions

SMD3030

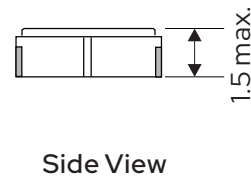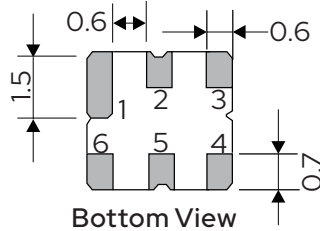

Pin No.	Function
2	Input/Output
5	Output/Input
Other	GND