


SAW Resonator

6AW Series SAW Resonator

315MHz~915MHz

Size: 3.2×2.5×0.7mm

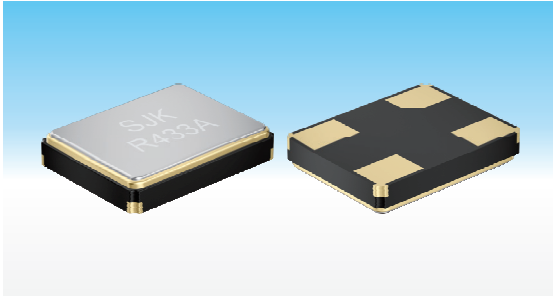

Features

- 1-port resonator, Surface mount 3.2×2.5×0.7mm package
- Low insertion loss
- Electrostatic Sensitive Device (ESD)
- Frequency range: 315MHz~915MHz
- Applications: Alarm, Remote control, PEPS, Automotive electronics, Consumer electronics, etc
- RoHS Compliant /Pb Free



Standard Specifications

Part Number	Center Frequency (MHz)	Frequency Tolerance	Insertion Loss (dB) max.	Package Code
R315	315	±30KHz/±75KHz	1.5	3225
R370	370	±30KHz/±75KHz	1.7	3225
R433	433.92	±30KHz/±75KHz	1.9	3225
R435	435.72	±30KHz/±75KHz	1.9	3225
R868	868.35	±75KHz/±150KHz	2.1	3225
R915	915	±75KHz/±150KHz	1.2	3225

Note: More frequencies, more information, please contact with our sales department directly.

Dimensions

TOP View

Bottom View

Side View

Pin No.	Function
1	Input/Output
3	Output/Input
Other	GND