


# SAW Resonator

QCC4A Series SAW Resonator

315MHz~868MHz

Size: 5.0×3.5×1.5mm

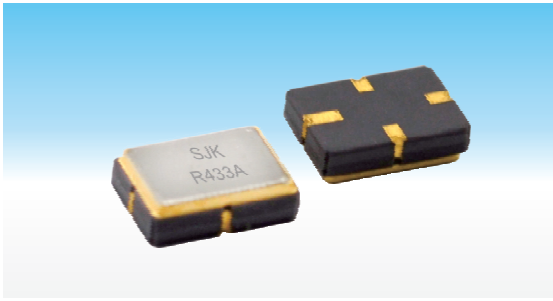

## Features

- 1-port resonator, SMD 5.0×3.5×1.5mm 4-pin package
- Package code: QCC4A
- Low insertion loss
- Electrostatic Sensitive Device (ESD)
- Frequency range: 303MHz~868MHz
- Applications: Alarm, Remote control, PEPS, Automotive electronics, Consumer electronics, etc
- RoHS Compliant /Pb Free



## Standard Specifications

Part Number	Center Frequency (MHz)	Frequency Tolerance	Insertion Loss (dB) max.	Package Code
R315	315	±30KHz/±75KHz	1.5	QCC4A
R318	318	±30KHz/±75KHz	1.2	QCC4A
R346.8	346.8	±30KHz/±75KHz	1.2	QCC4A
R370	370	±30KHz/±75KHz	1.7	QCC4A
R423.22	423.22	±30KHz/±75KHz	1.4	QCC4A
R433.42	433.42	±30KHz/±75KHz	1.4	QCC4A
R433	433.92	±30KHz/±75KHz	1.9	QCC4A
R434.42	433.42	±30KHz/±75KHz	1.4	QCC4A
R868	868.35	±75KHz/±150KHz	2.1	QCC4A

Note: More frequencies, more information, please contact with our sales department directly.

## Dimensions

